


Center Mounting Sleeve Part# 00697-CMS

SPECIFICATIONS
PAGE 1 OF 1

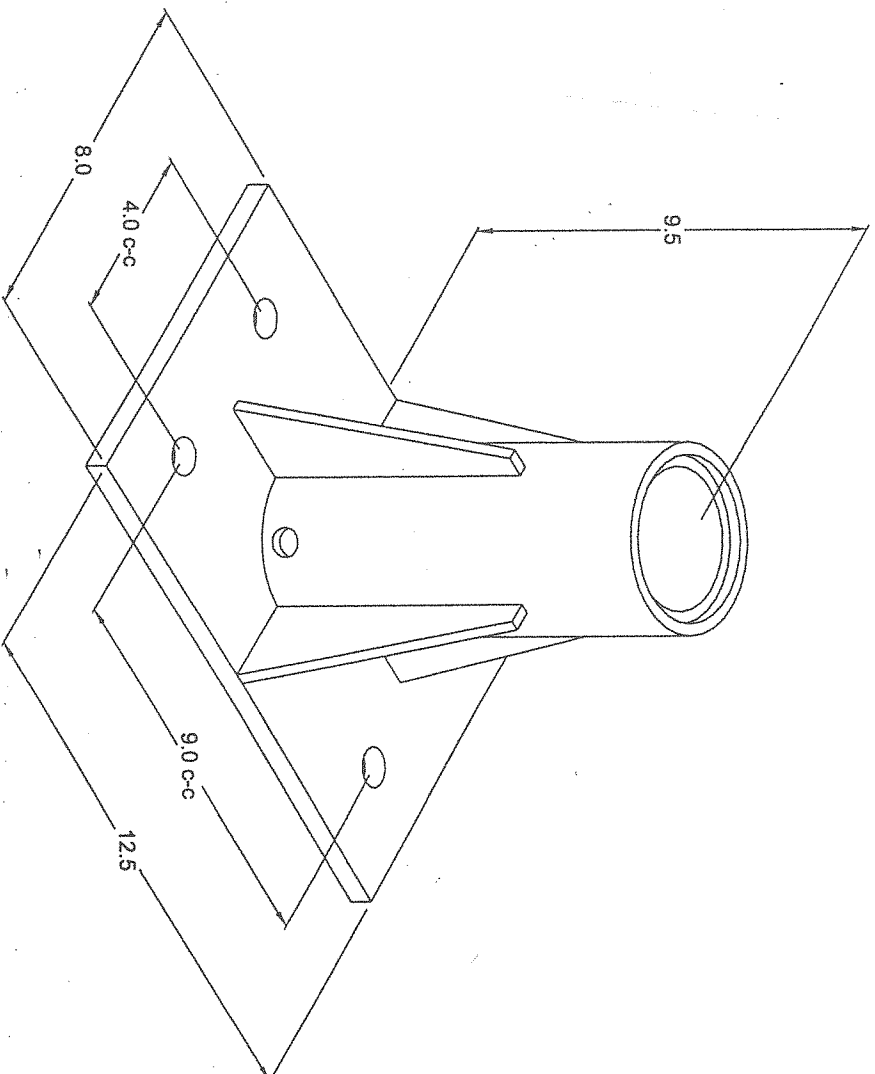

INSTALLATION SPECIFICATIONS**

BOLTING TO STEEL: Use (4) 5/8" Grade 5 or better or 304SS or better bolts of sufficient length that at least one full thread shows beyond the nut after installation.

BOLTING TO CONCRETE: Use (4) 5/8" x 7" ITW/Redhead Trubolt or Equal or (4) 5/8" 304SS threaded rods with ITW/Redhead C6 Epoxy or Equal. Anchors must maintain a minimum 5" embedment.

** In all cases it is the responsibility of the end user to ensure the anchorages this anchorage connector will be attached to are able to sustain the maximum rated load of this anchor.

DESCRIPTION	GENERAL SPECIFICATIONS
The Safe Approach center mount sleeve is designed to permanently mount in areas that require multiple mast positions.	General Construction – Welded Steel or Stainless Tubular Components – Sch 40 Pipe Finish – Orange Powder Coating Mast Rotation – 360 Degrees Weight – 25lbs.